


# MK 02

## Instruction Sheet

**Warning! This tool should not be used on live electrical circuits. It is not protected against electrical shock!** Always use OSHA/ANSI or other industry approved eye protection when using tools. This tool is not to be used for purpose other than intended. Read carefully and understand instructions before using this tool.

These tools are used for slitting the PE, PVC, or rubber insulation on electrical cables of between 3/16" and 1-1/8" diameter (4.5mm-28.5mm) with an insulation depth of up to 1/8" max(3mm), providing for efficient insulation removal.


1. The cutting blade is adjusted for depth of incision to the thickness of insulation by turning the knurled screw shown (A).
2. Position the cable between the cutting blade and gripping arm, which is spring loaded and holds the cable in contact with the blade.
3. Rotate the tool clockwise around the cable to provide a circumferential cut ensuring clean separation of the insulation(B).
4. Rotate the blade through 90 degrees by depressing the push button shown(C). While holding the button, pull the cutter along the length of the cable to provide the longitudinal cut (D).
5. The insulation may now be pulled clean away.
6. To aid removal of tough insulation, Model MK02 is provided with a ripping blade located in the base of the tool. The ripping blade is released by pressing the button shown (E).
7. The spherical profile blade for softer insulation is standard. The chisel point blade for harder coverings is optional. Note tool models and blade numbers in table below.
8. For cable diameters above 3/4"(19mm) remove plastic gripping arm cover(F) from the cable support bracket.

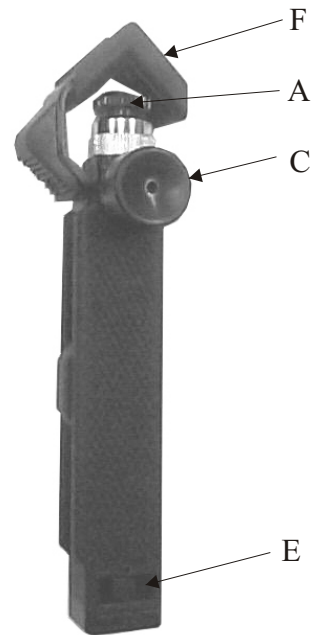

### REPLACEMENT BLADES

Replacement cutting blades are simply fitted by removal of the knurled adjuster screw and locking nut.

Model	Part No.	Product Features	
		Blade	Ripping blade
MK02 Tool	39390	Spherical	Yes
MK02 Tool	39393	Chisel	Yes
MK02M Tool	39490	Spherical	No
Replacement blade	39391	Spherical (set of 5)	
Replacement blade	39392	Chisel (set of 5)	



**WARRANTY:** RIPLEY warrants its products against defective materials and workmanship for a period of one year from date of shipment from the RIPLEY factory provided the product is utilized in accordance with instructions and specified ratings.



46 Nooks Hill Road  
Cromwell, CT 06416  
Phone: 800-528-8665  
Int'l: (01) 860-635-2200  
Fax: (01) 860-635-3631  
E-mail: info@ripley-tools.com  
Internet: www.ripley-tools.com

Ripley Europe Ltd  
Building 47, Bay 4, Second Avenue,  
The Pensnett Estate, Kinkswinford,  
West Midlands, England, DY6 7UZ.  
Phone: +44(0)1384400070  
Fax: +44(0)1384400060  
E-mail: info@www.ripley-tools.com  
Internet: www.ripley-tools.com

